


### SmartVerge® Linear Dry Verge System - Verge Units


CODE **GLV-RH/LH**

**Product Codes:**

Linear Dry Verge Unit (RH)	GLV-RH
Linear Dry Verge Unit (LH)	GLV-LH

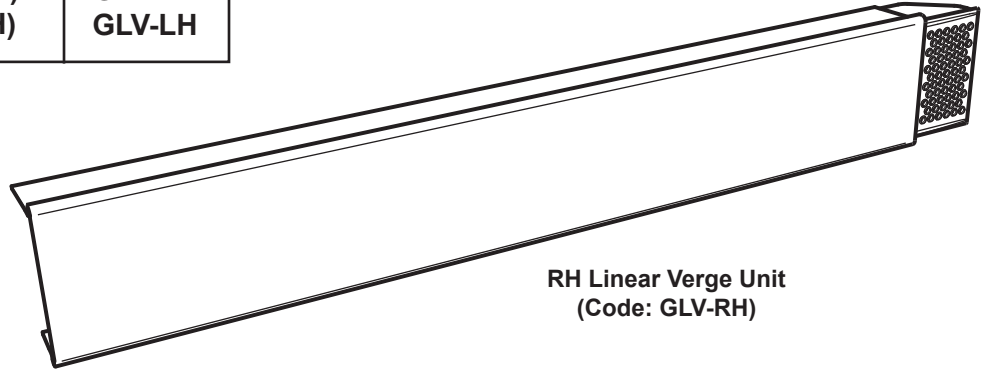

**RH Linear Verge Unit**  
(Code: GLV-RH)

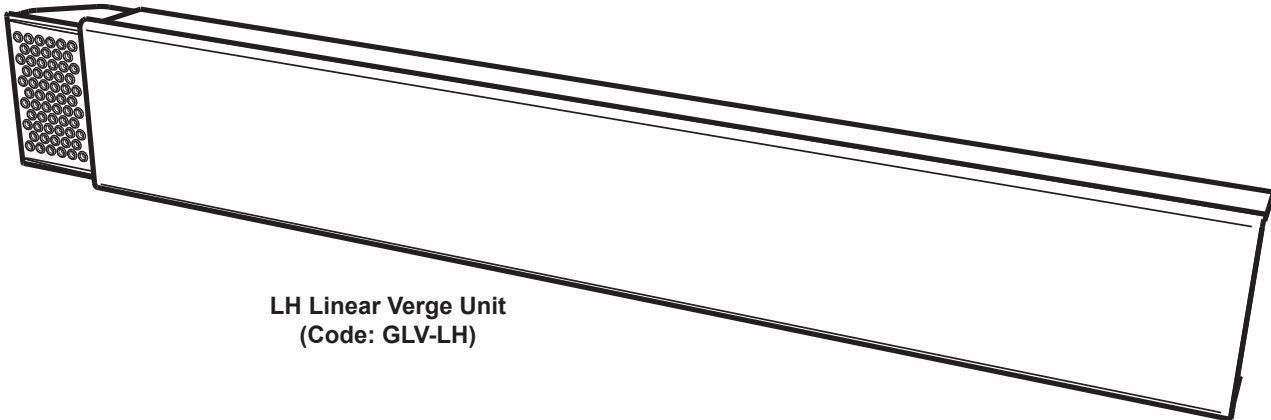

**LH Linear Verge Unit**  
(Code: GLV-LH)

**Description:**

The Manthorpe SmartVerge® Linear Dry Verge System provides a secure mechanical fixing solution for many types of roof coverings including Fibre Cement Slates, Natural Slates and Interlocking Plain Tiles.

The Linear Verge Units can be easily fitted to the verge of the roof in succession, locking the tiles in place to prevent wind uplift problems. The system is mortar-free and can be fixed in all weather conditions. Once fitted they are completely weatherproof and maintenance free.

The SmartVerge® Linear Dry Verge System is available in Slate Grey, Black, White, Terracotta and Dark Brown to compliment any variation of roof design. The Linear Dry Verge System preserves the continuous line of the verge, providing a neat and attractive finish.

**Left & Right Hand:**



**Right Hand Verge**



**Left Hand Verge**

*Illustration shows left and right hand verge units as viewed from outside the building. Note: careful attention should be taken when specifying 'left' and 'right'.*

**References:**

**BSI: British Standard 5534:2003**  
**BSI: British Standard 6399-2:1997**  
**NHBC Standards Chapter 7.2**

MANTHORPE BUILDING PRODUCTS LTD  
MANTHORPE HOUSE  
BRITAIN DRIVE  
CODNOR GATE BUSINESS PARK  
RIPLEY  
DERBYSHIRE DE5 3ND

TEL: 01773 514 200  
FAX: 01773 514 262  
EMAIL:  
sales@manthorpe.co.uk  
WEB  
www.manthorpe.co.uk

DRN R.P

Date 05.06.07

DRG No

Issue


The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

**MBP 8253**  
**(Page 1 of 2)**

**B**

### SmartVerge® Linear Dry Verge System - Verge Units

CODE **GLV**

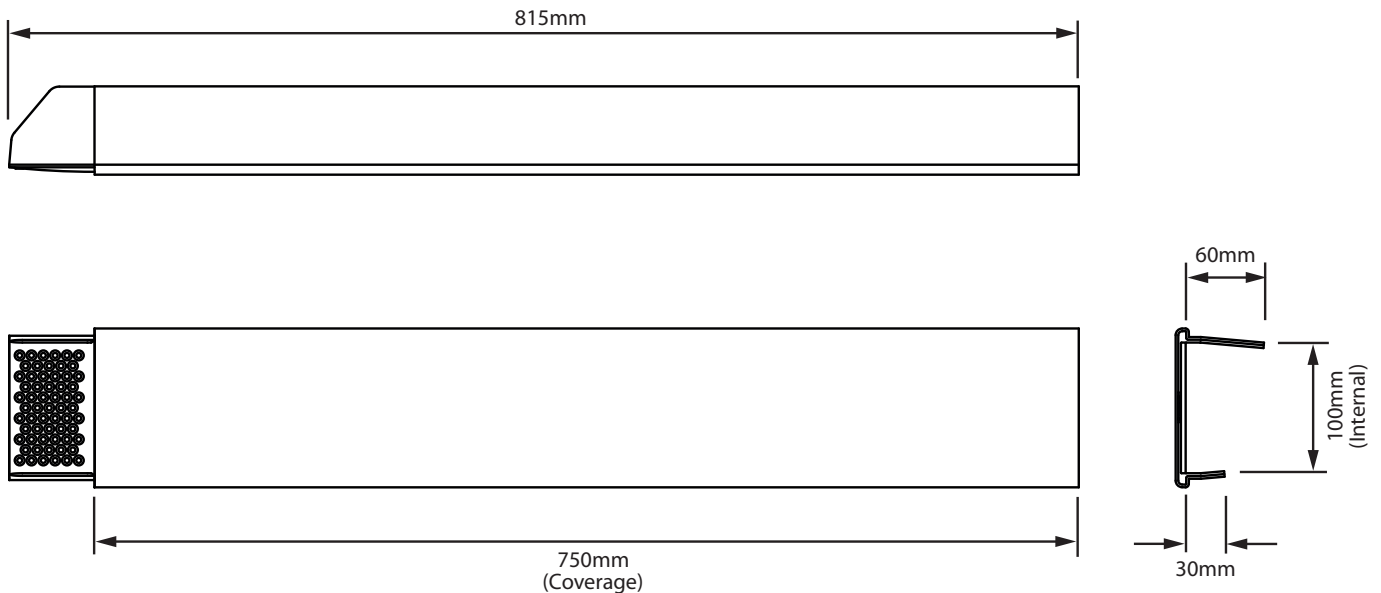

#### Guidance:

Each Linear Verge Unit should be fixed using aluminium or stainless steel, 3.35mm shank diameter spiral roll or annular shank nails, 38mm in length (these are not provided).

The Linear Verge Units should be used in conjunction with an additional **25mm x 38mm** batten strip securely fixed along the verge of the roof. Alternatively, they can be fixed directly onto the ends of the tiling battens if these are in good condition (may require sawing each Linear Verge Unit to align with batten ends).

At the eaves, the initial Verge Unit should be secured using an additional Fixing Clip ( Product Code: **GDV-FC**). For roofs where the bottom course tiles are tilted upwards, a joint can be made with an additional Verge Union (Product Code: **GDV-VU**).

At the ridge, the Angled or Round Ridge End Cap (Product Code: **GDV-END-A** or **GDV-END-R**) should be used to prevent the ingress of birds and large insects.

<b>MAX THICKNESS OF VERGE</b>	100mm (Inc. 38mm Batten Strip)
<b>ROOF PITCH COMPATABILITY</b>	15° to 55° Pitch
<b>PACKING DETAILS</b>	Linear Dry Verge Pack contains 10 Left or Right Linear Dry Verge Units plus Fixing Instructions. 3 Packs per Box.
<b>WEIGHT</b>	13.30 Kg per Box
<b>MATERIAL</b>	Unplasticized Polyvinyl Chloride (uPVC)
<b>MANUFACTURING PROCESS</b>	Injection Moulded
<b>COLOUR VARIATIONS</b>	<p>Slate Grey (GR)   Black (BL)   White (WH)   Terracotta (TR)   Dark Brown (BR)</p>

MANTHORPE BUILDING PRODUCTS LTD  
MANTHORPE HOUSE  
BRITAIN DRIVE  
CODNOR GATE BUSINESS PARK  
RIPLEY  
DERBYSHIRE DE5 3ND

TEL: 01773 514 200  
FAX: 01773 514 262  
EMAIL:  
sales@manthorpe.co.uk  
WEB  
www.manthorpe.co.uk

DRN R.P

Date 05.06.07

DRG No

Issue

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

**MBP 8253**  
(Page 2 of 2)

**B**